


PEINE Composite Wall System

Selection from the complete range	Section	System width	Second moment of inertia	Section modulus		Dead weight in relation to PSp length PZ length in % of PSp length				Coating area Water side m ² /m			
				PSp	a m	I _y cm ⁴ /m	W _y cm ³ /m	W _y ^I cm ³ /m	PZ 610		PZ 612		
									60 % kg/m ²		100 % kg/m ²	60 % kg/m ²	100 % kg/m ²
Combination 10/23	370	1.60	41100	2230	-	142	186	149	198	1.24			
	400	1.60	46230	2320	-	145	189	153	202	1.24			
	500	1.60	65930	2640	-	151	195	158	207	1.24			
	600	1.68	108240	3610	-	174	216	182	228	1.23			
	606	1.68	119530	3950	-	184	226	191	238	1.23			
	700	1.68	146450	4190	-	181	223	188	235	1.23			
	706	1.68	161800	4590	-	191	232	198	244	1.23			
	800	1.68	204180	5110	-	194	236	201	248	1.23			
	806	1.68	224190	5570	-	204	246	211	257	1.23			
	900	1.68	261240	5810	-	201	242	208	254	1.23			
	906	1.68	286560	6330	-	210	252	218	264	1.23			
	1000	1.68	327100	6550	-	207	249	214	261	1.23			
	1006	1.68	358330	7130	-	217	259	224	271	1.23			
	1001	1.68	368890	7380	-	222	263	229	275	1.23			
	1013	1.68	388520	7740	-	228	269	235	281	1.23			
	1016	1.68	400120	7960	-	231	273	238	285	1.23			
	1016 S	1.68	432250	8550	-	241	283	248	295	1.23			
	1017	1.68	459560	9040	-	250	291	257	303	1.23			
	1030	1.68	499340	9700	-	272	313	279	325	1.23			
	1035 S	1.68	527630	10200	-	280	322	287	333	1.23			



Selection from the complete range	Section	System width	Second moment of inertia	Section modulus		Dead weight in relation to PSp length PZ length in % of PSp length				Coating area Water side m ² /m	
				PSp	a m	I _y cm ⁴ /m	W _y cm ³ /m	W _y ^I cm ³ /m	PZ 675-12		
									60 % kg/m ²		100 % kg/m ²
Combination 10/23	370	1.75	44010	2380	-	141	189		1.23		
	400	1.75	48700	2440	-	145	192		1.23		
	500	1.75	66700	2670	-	149	197		1.23		
	600	1.83	105510	3520	-	171	217		1.22		
	606	1.83	115880	3830	-	180	226		1.22		
	700	1.83	140590	4020	-	177	223		1.22		
	706	1.83	154670	4390	-	186	232		1.22		
	800	1.83	193570	4840	-	189	235		1.22		
	806	1.83	211950	5260	-	198	244		1.22		
	900	1.83	245960	5470	-	195	241		1.22		
	906	1.83	269190	5950	-	204	250		1.22		
	1000	1.83	306410	6130	-	201	247		1.22		
	1006	1.83	335080	6670	-	210	256		1.22		
	1001	1.83	344770	6900	-	215	260		1.22		
	1013	1.83	362790	7230	-	220	266		1.22		
	1016	1.83	373430	7430	-	224	269		1.22		
	1016 S	1.83	402930	7970	-	233	278		1.22		
	1017	1.83	428000	8420	-	240	286		1.22		
	1030	1.83	464520	9020	-	260	306		1.22		
	1035 S	1.83	490480	9480	-	268	314		1.22		

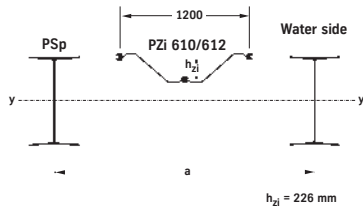