



ThyssenKrupp GfT Tiefbautechnik

Antriebsaggregat power pack MS-A 840 V	TA 0994 Dat.: 30.11.2004 Name: Riehl
--	---

TECHNISCHE DATEN:

Dieselmotor: Leistung
 Drehzahl
 Verteilergetriebe:
 Dieseltank: max. vol.
 Hydrauliktank: max. vol.
 Gewicht: ohne Treibstoff

TECHNICAL DATA:

diesel engine: performance
 speed
 distributor gear
 fuel tank: max. volume
 hydraulic tank: max. vol.
 weight: without fuel

2 x 421 = 842 [kW]
 2100 [min⁻¹]
 i=0,704
 2200 [l]
 600 [l]
 12500 [kg]

PUMPENAUSRÜSTUNG:

Vibr.-Antriebspumpen:
 Fördermenge: max.
 Arbeitsdruck: max.
 Spannhydr.-Pumpe:
 Fördermenge:
 Arbeitsdruck: max.
 Steueröl-Pumpe:
 Fördermenge:
 Arbeitsdruck: max.

PUMP EQUIPMENT:

vibr. drive pumps
 delivery: max.
 working pressure: max.
 clamp-hydr. pump:
 delivery:
 working pressure: max.
 pump for amplitude:
 delivery:
 working pressure: max.

4 x 130 [cm³/U]
 4 x 370 = 1480 [l/min]
 380 [bar]
 10 [cm³/U]
 28 [l/min]
 350 [bar]
 6 [cm³/U]
 17 [l/min]
 250 [bar]

KÜHLERAUSRÜSTUNG:

Hydraulikölkühler:
 Öl-Luft-Kühler
 Kühlleistung:
 Vibratorgetriebeöl-Kühler:
 Öl-Luft-Kühler
 Kühlleistung:

COOLER EQUIPMENT:


hydr. oil cooler:
 oil-air-radiator
 cooling capacity:
 vibr. gear-oil cooler:
 oil-air-radiator
 cooling capacity:

120 [kW]

 ** [kW]

- * = optional mit Amplitudenverstellung / optional with amplitude adjustment
- ** = optional vom Vibrator abhängig / optional dependent on vibrator

L	B	H	
5300	2400	2570	[mm]
208.7	94.5	101.2	[inch]

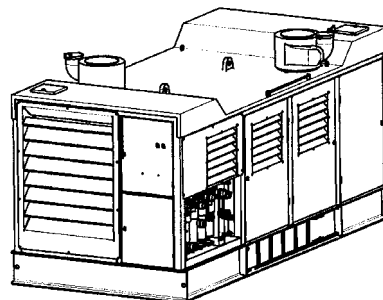

Subject to Technical modifications

Distributed in Australia & New Zealand by ThyssenKrupp Steelcom A company of ThyssenKrupp Services		ThyssenKrupp
PO Box 840 North Sydney NSW 2059 Australia T: + 61 2 9954 9166 Sales + 61 2 4966 0688 F: + 61 2 9955 4298 enquiries@steelcom.com.au www.steelcom.com.au	PO Box 51254 Pakuranga Auckland 2140 New Zealand T: + 64 9 576 3977 F: + 64 9 576 3978 afenn@steelcomnz.co.nz www.steelcomnz.co.nz	